

RUVITEX PVC OUTLET H240 D75

Ruvitex PVC Outlet H240 D75 Ruvitex through roof outlets are intended to form a watertight seal between Ruvitex roof membranes and the roof drainage pipe work.

The smooth flange on the top provides a suitable welding area for the Ruvitex roof membrane. The flange and the membrane being welded must be clean and free from contamination prior to welding. Check seam with seam probe after welding.

The two rings on the shank help to form a seal between the roof outlet and the rain water drainage pipe work. It is important that the shank of the outlet and the drainage pipe work are pushed together far enough for the two rings to be effective.

DN	dl	d2	d3	d4	h
75mm	320mm	65mm	61mm	70mm	240mm






RUVITEX UK LTD

Queens Road Hersham Surrey KT12 5LW

Phone: +44 (0) 1484 429 397 Mobile: +44 (0) 7939 353 595 Fax: +44 (0) 872 115 3075 E-mail: info@ruvitex.co.uk Web: www.ruvitex.co.uk

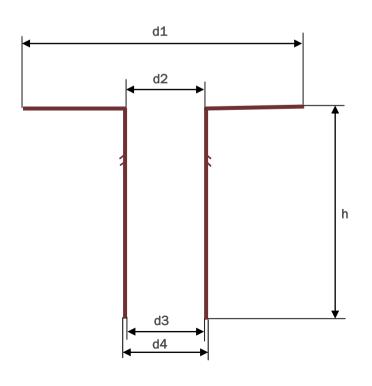

RUV 0 D75 REV 10 13