

PRODUCT DATASHEET



DIMENSIONS

Ruviplan V	
Thickness	1.5mm
Weight	1.85k/m ²
Roll Dimensions (m)	
1.10 x 15	

COLOUR

Ruviplan V is available as standard in dark grey (closest RAL 7015). Other colours are available subject to minimum order quantity. Colour variations may occur between batches. Produced using high quality colour pigment and stabilisers the dark grey colour can resemble lead roof covering.

TENSILE STRENGTH

Ruviplan V membranes have excellent tensile strength and are designed to be resistant to wind uplift forces as well as thermal and structural movement of buildings.


Ruvimat D Tensile Strength		
Test method	ISO EN 12311-2	
Tensile Strength N/50mm not less than	length	600
	crossways	600



Ruvitex UK Limited
 74 Queens Road, Hersham,
 Surrey, KT12 5LW
 T +44 (0) 1484 429 397
 F: +44 (0) 872 115 3075
 E: info@ruvitex.co.uk
 Web: www.ruvitex.co.uk

RUVIPLAN V

Ruviplan V is the principal waterproofing material for exposed roof applications where the system is described as a 'Bonded System'. Ruviplan V systems are suitable for new and renovation of flat, pitched and curved roof configurations.

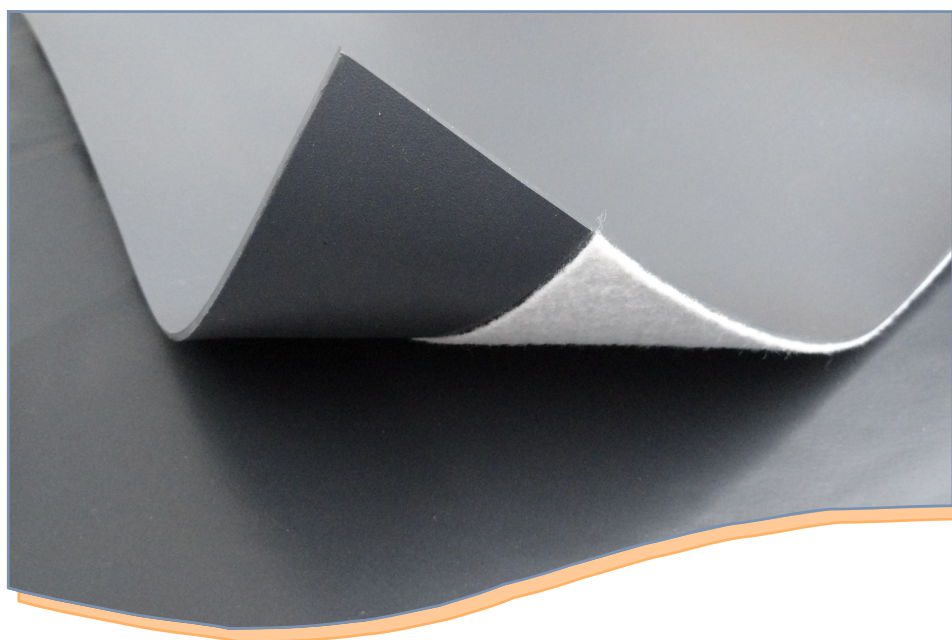

Material

Ruviplan V membranes are manufactured from pliable PVC with a non-woven synthetic fabric on the underside of the sheet. The synthetic fabric on the underside provides the key for the adhesive bonding of the membrane to the substrate and adds strength and durability to the membrane. The PVC contains stabilisers, that make the membrane resistant to high and low temperatures, UV resistant and self extinguishing in event of fire.

Resistance to wind forces

Ruviplan V has excellent tensile and tear strength and is designed to resist the forces of wind and weather during many years of service. During the manufacturing process, the PVC and synthetic fabric are fused together to produce one homogenous sheet.

Low temperature flexibility

Ruviplan V is manufactured to withstand the low temperatures during winter. The membrane remains flexible during installation and when in use without fracturing.

Ruviplan V remains flexible at -25° C.

PRODUCT DATASHEET



COLD RESISTANCE

Ruviplan V contains stabilisers which ensure that the membrane is resistant to low and high temperatures.

Ruviplan V Cold Resistance	
Test method	ISO EN 495-5
Cold Resistance	Down to -25°C

FIRE RESISTANCE

Ruviplan V has been tested by the BRE in accordance with BS EN 13501-5:2005+A1:2009 using test method CEN/TS 1187:2012 Test 4 and has been classified Broof(t4)

Ruviplan V Fire Resistance	
Test method	EN 13501-5 CEN/TS 1187:2012 Test 4
Flammability	B _{Roof} (t4)



Ruvitex UK Limited
74 Queens Road, Hersham,
Surrey, KT12 5LW
T +44 (0) 1484 429 397
F: +44 (0) 872 115 3075
E: info@ruvitex.co.uk
Web: www.ruvitex.co.uk

RUVIPLAN V

Puncture Resistance

Ruviplan V membranes are resistant, without damage, to the limited foot traffic and light concentrated loads associated with the installation and maintenance work. On areas of frequent foot traffic i.e. roof access points and routes to roof-top plant etc a suitable protection layer should be used. Ruviplan walkway membrane, paving slabs on supports or other preparatory walkways should be used.

Life Expectancy

Ruviplan V has been subjected to accelerated weather tests that have indicated a minimum life expectancy of over 25 years. PVC single ply roofing membranes were first used in Europe in the 1960's and many continue to provide service after 35 years.

Application

Ruviplan V membranes suitable for use with faced ridged foam and mineral wool insulation boards, plywood and OSB boards. Ruviplan V membranes are ideal on projects where the fixing penetrations normally associated with mechanically fastened systems is either impracticable or undesirable. During application the roof temp must not be below 5°C or in excess of 30°C, as the working time and performance of the adhesive will be dramatically reduced.

Installation

Ruviplan V membranes must be installed by applicators/contractors who have the necessary experience and equipment and have undergone the required training. Inspection of overlap, seams and general installation must be carried out during and on completion of each installation.

